


STRONG



SG 785 (A)




SG 786 (A)




SG 787

STRONG



Zusammensetzung
Composition
Samenstelling
72% Cradura (PA)
16% Certified virgin wool (WV)
12% Redesigned Lenzing FR™




Breite
Width
Largeur
Breedte
141 cm



Gewicht
Weight
Poids
Gewicht
437 g/m




Scheuerverhalten
Abrasion resistance
Résistance à l'abrasion
Slijtvastheid
Martindale
EN ISO 12947-2
500'000 cycles



Pilling
Pilling
Boulochage
Pilling
EN ISO 12945-2
Grade 4



Reibechtheit
Fastness to rubbing
Résistance au frottement
Wrijftechtheid
EN ISO 105-X12
Dry/wet: grade 4-5 / 4-5



Lichtechtheit
Fastness to light
Solidité à la lumière
Lichtechtheid
EN ISO 105-B02
6-7




Brandverhalten
Flammability
Réaction au feu
Brandwerendheid
EN 1021 Part 1+2
BS 5852 Part 0+1
IMO Resolution MSC 307 (88);
Annex 1, part 8
UNI 9175, Classe UNO I EMME
California TB 117, Class 1



Schweissechtheit
Fastness to perspiration
Transpiration
Transpiratie
EN ISO 105-E04
Alkaline, Score 5
Acid, Score 5

Ⓐ Diese Farben sind auch mit antistatischer Ausführung erhältlich
These colours are also available in an antistatic version
Ces coloris sont également disponibles dans la version antistatique
Deze kleuren zijn ook verkrijgbaar in antistatische uitvoering

Änderungen und Farbabweichungen vorbehalten
Subject to modifications and colour variations
Sous réserve de modifications et de différences de couleur
Wijzigingen en kleurafwijkingen voorbehouden

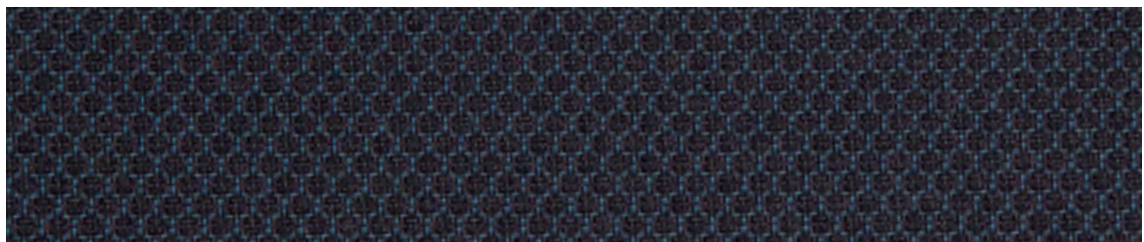

printed in
switzerland

Stoll Giroflex AG 11/2015 1910 Ex.

Stoll Giroflex AG
CH-5322 Koblenz
Tel.: +41 (0) 56 267 91 11
info@giroflex.ch

Giroflex GmbH
D-78187 Geisingen
Tel.: +49 (0) 7704 9279 0
info@giroflex.de

Giroflex Nederland BV
NL-1184 VW Ouderkerk aan de Amstel
Tel.: +31 (0) 20 47 22 555
info@giroflex.nl

Giroflex France
Tél.: +33 (0) 800 91 72 71
info@giroflex.be

Giroflex SA
B-1200 Bruxelles
Tél.: +32 (0) 2 761 20 20
info@giroflex.be

www.giroflex.com

giroflex
designed to work